




# Portable 12-Ton Air Conditioners

## 12T 208/3

<b>Cooling Capacity</b>	Btu/Hr @ 80° Drybulb and 67° Wetbulb Entering Air Temperature	12 Ton - 144,000
<b>Heating Capacity</b>	Btu/Hr	Optional
<b>Dimensions</b>	Width (Inches) Depth (Inches) Height (Inches) Weight (Pounds)	46 68 59 1,200
<b>Electrical Characteristics</b>	Power Supply (Volts) Power Consumption (Kilowatts) Current Consumption (Amperes) Service Required (Amperes) Min-max Voltage Power Cord Gauge Power Cord Length (Feet)	208-230/60/3 Phase 20 74 100 200-240 4 110
<b>Evaporator Fan</b>	Fan Type Air Flow (CFM) Max. External Static Pressure (Inches Of Water Gauge) Supply/Return Flanges Flange Diameter (Inches) Max. Length of Ducting (Feet)	Centrifugal 4,800 1.5  2/2 14 75
<b>Compressor</b>	Compressor Type R-22 Charge (Pounds) Operating Range	Hermetic Scroll 32.5 -30°F + 105°F
<b>Miscellaneous Features</b>	Remote Thermostat Compressor Overload Relay Fan Motor Protection Anti-freeze Thermostat High-Pressure Switch Compressor Short-cycle Protection Accommodates Condensate Pump Humidity Removed @60% RH (Gallons per Hour) Low Pressure Switch Phase Protection Low Ambient Operation	Optional Yes Yes Optional Yes Optional Optional 6  Yes Yes Flooded Condenser

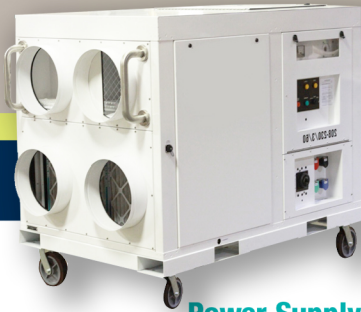

## Portable 12-Ton Air Conditioners

# 12T 208/3

**Power Supply** 208-230 volts 60 hertz 3 phase 74 amperes

**Width** 46 inches

**Depth** 68 inches

**Height** 59 inches

**Weight** 1,200 lbs

All models are backed by a 12-month parts warranty.

